

Features and Benefits



- ☒ Range of stainless steel Egress friction stays for top hung and side hung applications
- ☒ Metal end caps for more robust and accurate sealing.
- ☒ Available in 17mm stack height.
- ☒ Available in 10" to 26" Top hung and 10" to 16" side hung.
- ☒ 16" and 22" top hung also available with reinforced third link to pass the "blocked shoe" test supplied as standard on 26" top hung.
- ☒ 10" to 16" side hung open around 90 degrees for easy cleaning of windows.
- ☒ Adjustable opening stop on top hung hinges.
- ☒ 10 year mechanical guarantee.
- ☒ BSEN ISO 9001/2008 Quality Management System.

Technical Information

Material Specification

Stainless Steel - Grade 430

Assessment Data

Performance: 10,000 cycle guarantee.

Additional Information

Box Qty: 25 Pairs.


It is the responsibility of the window manufacturer to ensure that the finished window meets any required safety and performance specifications.

WINLOCK




Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS
Tel:01952 602250 Fax:01952 602255.
Email:sales@winlock.co.uk Web:www.winlock.co.uk


Technical Drawing

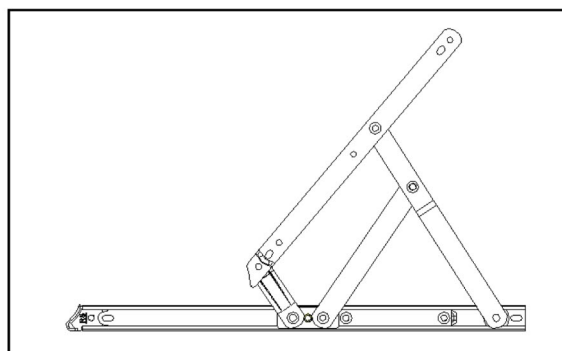


MIN/MAX WORKING
CLEARANCE



EXAMPLE
16mm STACK
MIN. 16mm
MAX. 17mm

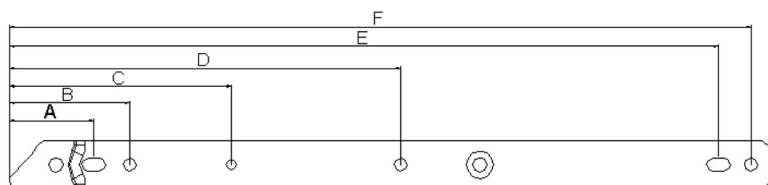

Top view of fourth
arm vent fixing holes

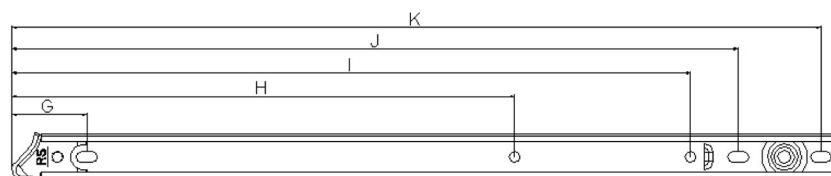

Underside of channel
fixing hole

Part No.	TOP HUNG	NORMAL SIDE	OPENING ANGLE	MAX. VENT WEIGHT	MAX VENT HIGHT	MIN. VENT HIGHT
FSHD22TH10	TOP HUNG	10" (250mm)	50°	81.5 lb (37kg)	25" (635mm)	10.5" (267mm)
FSHD22TH12	TOP HUNG	12" (300mm)	50°	99.2 lb (45kg)	30.9" (787mm)	25.0" (635mm)
FSHD22TH16	TOP HUNG	16" (400mm)	50°	126.1 lb (55kg)	42.9" (1090mm)	31.0" (787mm)
FSHD22TH22	TOP HUNG	22" (550mm)	45°	165.3 lb (75kg)	59" (1500mm)	42.9" (1090mm)
FSHD22TH26	TOP HUNG	26" (650mm)	20°	220.4 lb (100kg)	78.7" (2000mm)	50.0" (1270mm)
FSHD22TH28	TOP HUNG	26" (650mm)	Restrict to 15°	330.6 lb (150kg)	78.7" (2000mm)	50.0" (1270mm)

Part No.	SIDE HUNG	NORMAL SIDE	OPENING ANGLE	MAX. VENT WEIGHT	MAX. VENT WIDTH	MIN. VENT WIDTH
FSHD22SH10	SIDE HUNG	10" (250mm)	85°	83.7 lb (38kg)	26" (660mm)	11.81" (300mm)
FSHD22SH16	SIDE HUNG	16" (300mm)	90°	103.6 lb (47kg)	33" (838mm)	17.72" (450mm)

FIXING HOLE DETAILS

Part No.	TOP OR SIDE HUNG	A	B	C	D	E	F	G	H	I	J	K
FSHD22TH10	TOP HUNG	32.5	46.5	73.5	---	197.5	210	35.5	---	206.5	---	254
FSHD22SH10	SIDE HUNG	32.5	46.5	66.5	---	198	210.7	35.5	---	213.5	---	254
FSHD22TH12	TOP HUNG	32.5	46.5	97.5	---	223	235.5	35.5	---	248	---	304
FSHD22TH16	TOP HUNG	32.5	46.5	151.2	---	274.2	286.7	35.5	251	339	---	406.5
FSHD22SH16	SIDE HUNG	32.5	46.5	97.5	---	274.5	287	35.5	---	339.5	---	406.5
FSHD22TH22	TOP HUNG	32.5	46.5	97.5	236.5	350.5	363	35.5	287.5	453.5	---	558
FSHD22TH26	TOP HUNG	37.5	51.5	93.5	331.5	453	465.5	35.5	---	350	600	672

WINLOCK

Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS
Tel:01952 602250 Fax:01952 602255.

Email:sales@winlock.co.uk Web:www.winlock.co.uk