


## Features and Benefits

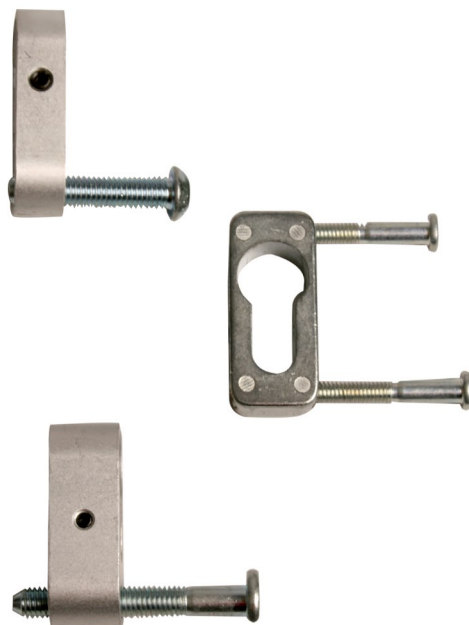

- ⌘ Prevents external removal of the door cylinder.
- ⌘ Alternative design options.
- ⌘ Fits most Euro-profile cylinders.
- ⌘ Designed for composite, timber and PVCu doors.
- ⌘ Tested to meet the requirements of PAS 023/024
- ⌘ Designed to be retro-fitted to existing doors.
- ⌘ Enhance the security of the cylinder and lock.
- ⌘ High performance guaranteed.
- ⌘ 10 year performance guarantee - subject to terms and conditions.

### Technical Information

#### Material Specification

##### Composite Door -

**Cylinder Guard:** Extruded Aluminium, 12mm deep.

**Bolts:** 8mm diameter high tensile steel bolts 41mm long.

**Grub Screw:** Black carbon steel 2mm.

##### PVCu Door -

**Cylinder Guard:** Extruded Aluminium 18mm deep.

Zinc alloy casting BS EN 12844:13mm deep.

**Bolts:** 8mm diameter high tensile steel bolts 59mm long.

##### Inward opening composite & PVCu Doors:

6mm diameter high tensile steel bolts 50mm long x 2.

**Grub Screw:** Black carbon steel 2mm

**Setting Block:** Zinc alloy casting.

#### Assessment Data

Corrosion Resistance: Meets the requirements of BS EN 1670 Grade 4 240 Hrs NS.

Operation: Security tested to meet the requirements of PAS 023/024.

#### Additional Information

**Box Qty:** 20 pcs per box.,  
outer box of 240 pcs

**Accessories:** Allen key not supplied.

# WINLOCK

Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS  
Tel:01952 602250 Fax:01952 602255.  
Email:sales@winlock.co.uk Web:www.winlock.co.uk