

Features and Benefits



- ☒ Range of stainless steel friction stays for top hung and side hung applications
- ☒ BBA Approved - BBA Assessment Report S2/45654.
- ☒ Available in both 13mm and 17mm stack height to suit most common casement profiles.
- ☒ Available in 8", 10", 12", 16", 20" and 24" Top hung.
- ☒ Side hung variations in 12" and 16".
- ☒ Fitted with Winlock Hinge Protector, Imperial stay exceeds the requirements of BS7950 - the simplest and surest way to meet the security standards.
- ☒ 10 year mechanical guarantee.
- ☒ BSEN ISO 9001/2008 Quality Management System.

Technical Information

Material Specification

Stainless Steel - Grade 430

Assessment Data

Performance: 30,000 cycle guarantee.
240 Hours Corrosion Resistance.

Additional Information


Box Qty: 25 Pairs.

It is the responsibility of the window manufacturer to ensure that the finished window meets any required safety and performance specifications.

WINLOCK

Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS
Tel:01952 602250 Fax:01952 602255.
Email:sales@winlock.co.uk Web:www.winlock.co.uk

Technical Drawing

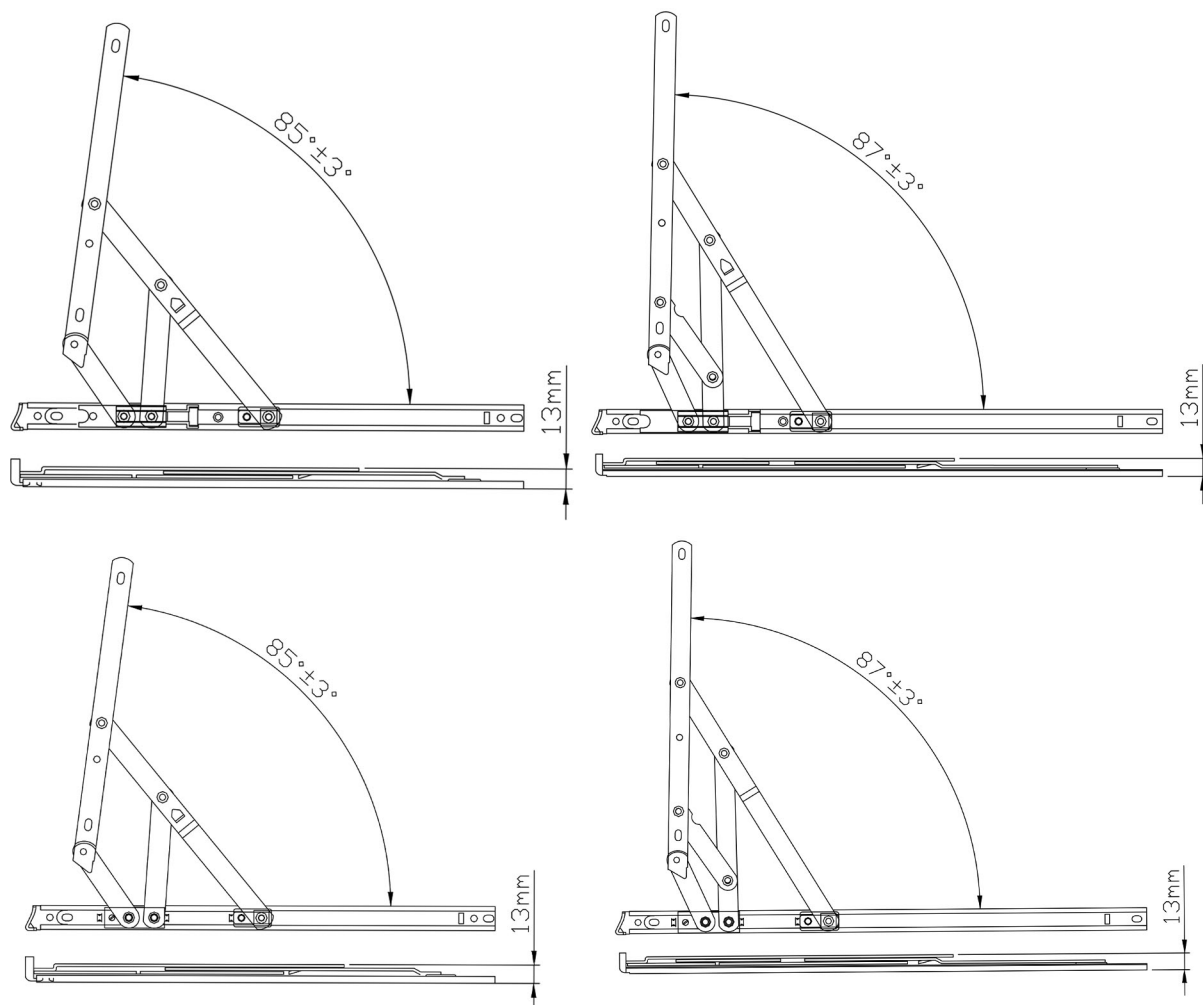

Vent Size & Type	12" - SH	16" - SH
Max Vent Width	600mm	600mm
Max Vent Height	1250mm	1300mm
Max Vent Weight	20kgs	24kgs
Opening Angle	85°	85°
Min Vent Height	300mm	400mm
Boxed Quantity	25 Pairs	25Pairs

Part Numbers

FS-13SH12EC	Imperial Friction Stay Side Hung, Egress/Easyclean 12" - 13mm Stack	Stainless Steel (430)
FS-17SH12EC	Imperial Friction Stay Side Hung, Egress/Easyclean 12" - 17mm Stack	Stainless Steel (430)
FS-13SH16EC	Imperial Friction Stay Side Hung, Egress/Easyclean 16" - 13mm Stack	Stainless Steel (430)
FS-17SH16EC	Imperial Friction Stay Side Hung, Egress/Easyclean 16" - 17mm Stack	Stainless Steel (430)

WINLOCK

Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS
 Tel:01952 602250 Fax:01952 602255.
 Email:sales@winlock.co.uk Web:www.winlock.co.uk

Imperial Egress/Easy Clean

Window
&
Door
Hardware
Solutions