

Protector (3000) Door Lock

Window
&
Door
Hardware
Solutions

Features and Benefits



- ☒ New and exclusive 35mm backset door lock.
- ☒ 62/92 PZ for single spindle or twin spindle operation.
- ☒ 3 hooks, 4 rollers and latch for maximum performance.
- ☒ One piece striker profile related using GU packer system.
- ☒ Available in 2 versions master lock, dependent upon hook distance.
- ☒ Slave Door version.
- ☒ Extendable to accept top and bottom shootbolt on all models.
- ☒ Non handed locks.

Technical Information

Material Specification

Lock Case: Steel CR3 Passivate & Seal.
Face Bar: Steel CR3 Passivate & Seal
Rollers: Steel Passivate & Seal
Keeps: Steel CR3 Passivate & Seal
One Piece Keep: Steel CR3 Passivate & Seal.

Assessment Data

Performance: Endurance tested 100,000 operations.
Corrosion resistance: BSEN 1670
Grade 4, NSS 240 Hour.

Additional Information


Box Qty: 5
One piece keeps available for maximum flexibility and security.
Dust buckets available on request.

WINLOCK



Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS
Tel:01952 602250 Fax:01952 602255.
Email:sales@winlock.co.uk Web:www.winlock.co.uk

Technical Drawing

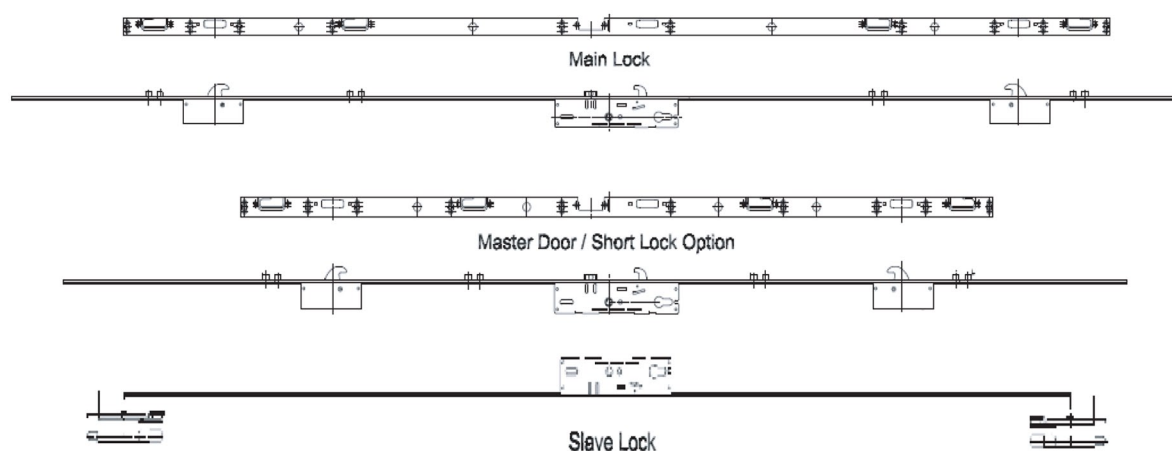

Part Numbers

Part Number	Description	Finish
DLGUPROLOCKLONG	GU protector Lock Long 3 Hook 4 Roller, 16mm F/Plate 35mm B/Set,92/62 Twin Spindle Extendable	Silver
DLGUPROLOCKSHORT	GU Protector Lock Short 3 Hook 4 Roller, 16mm F/Plate 35mm B/Set, 92/62 Twin Spindle Extendable	Silver
DLGUPROLOCKSLAVE	GU Protector Slave Lock, 16mm F/Plate 35mm B/Set,92/62 Twin Spindle Extendable	Silver

WINLOCK

Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS
Tel:01952 602250 Fax:01952 602255.
Email:sales@winlock.co.uk Web:www.winlock.co.uk