Features and Benefits



- The Excalibur door lock features three hooks as standard.
- Alignment marks for ease of fitting.
- □ Suitable for both timber and composite doors.
- □ 45mm backset.
- Radius end faceplate.
- □ 20mm wide faceplate.
- Twin spindle for lever-lever or lever-pad operation.
- Fully retractable for 2mm rebate.
- Bi directional claws
- □ PAS023/24 approved and Secured by Design.

Additional Information

Individual keeps available

for maximum flexibility and security.

Box Qty: 5

□ 10 Year Guarantee.

Technical Information

Material Specification

Lock Case: Steel CR3 Passivate & Seal. Face Bar: Steel CR3 Passivate & Seal Rollers: Steel Passivate & Seal Keeps: Steel CR3 Passivate & Seal One Piece Keep: Steel CR3 Passivate & Seal.

Assessment Data

Performance: Endurance tested 100,000 operations.

Corrosion resistance: BSEN 1670:2007

Grade 4, NSS 240 Hour.

PAS023/24 approved and Secured By Design Licenced.

WINLOCK

Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS Tel:01952 602250 Fax:01952 602255. Email:sales@winlock.co.uk Web:www.winlock.co.uk

Window &
Door
Hardware
Solutions


&

Door

Hardware

Solutions

Technical Drawing

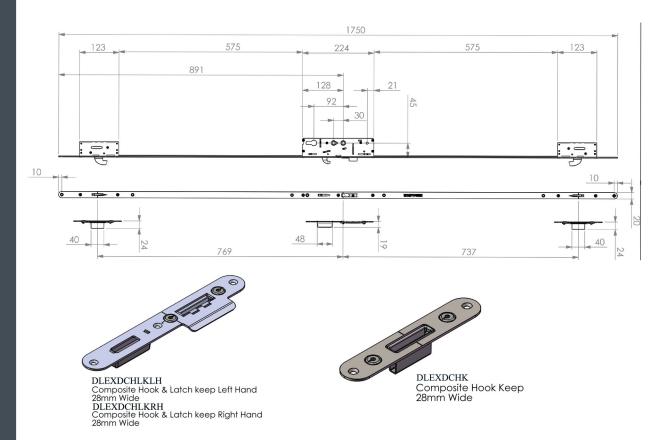

Part Numbers

| Part No. | Description | Finish |
|-------------|--|--------|
| EXDLC3HNR | Excalibur Door Lock Composite, 3 Hook No Roller, 20mm F/P Radius Ends 45mm B/S | Silver |
| DLEXDCHK | Excalibur Composite Hook keep | Silver |
| DLEXDCHLKLH | Excalibur Composite Hook and Latch Keep Left Hand 28mm wide | Silver |
| DLEXDCHLKRH | Excalibur Composite Hook and Latch Keep Right Hand 28mm wide | Silver |

WINLOCK

Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS Tel:01952 602250 Fax:01952 602255.

Email:sales@winlock.co.uk Web:www.winlock.co.uk