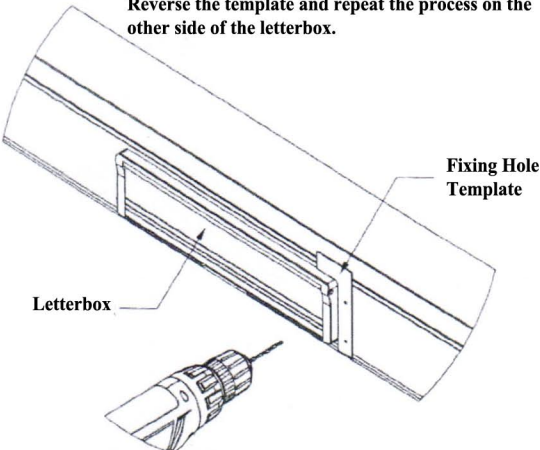
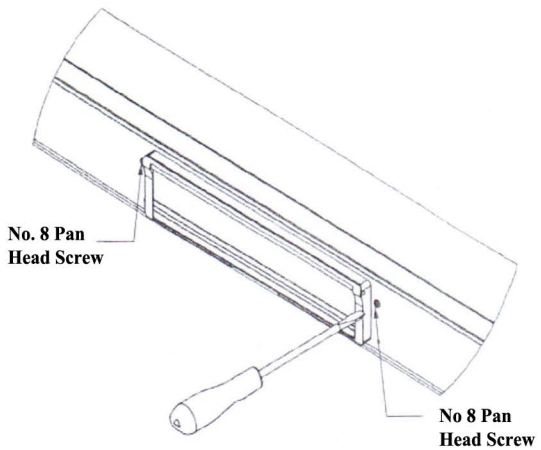
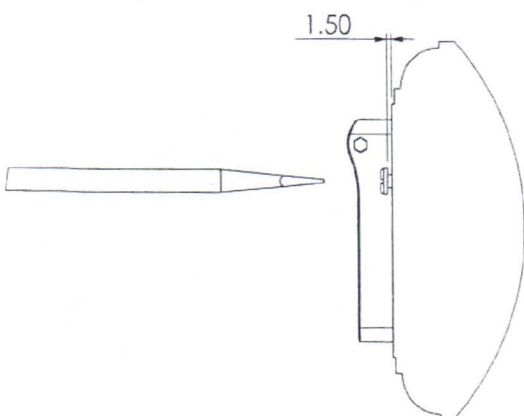



## Security Cowl Fitting Instructions


- 1** Position the fixing hole template as shown in Fig. 1, and drill 2 holes with a 3.00mm high speed drill. Reverse the template and repeat the process on the other side of the letterbox.



- 2** Screw in 2 x No. 8 pan head screws into the top two holes shown in Fig. 2. (One either side of the letterbox)


- 2a** Leave a gap of approx 1.50mm between the front of the door and the head of the screw as shown in Fig. 2a.


- 3** Slide the cover onto the screws using fixing hole A in the security cowl as shown in Fig.3.

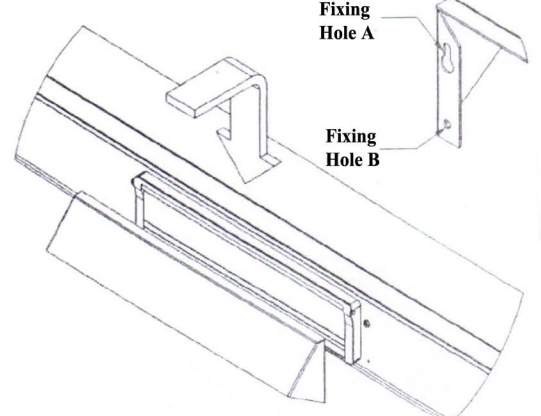
- 4** Secure security cowl into place by screwing a further two No. 8 pan head screws into fixing hole B. as shown in Fig.4.

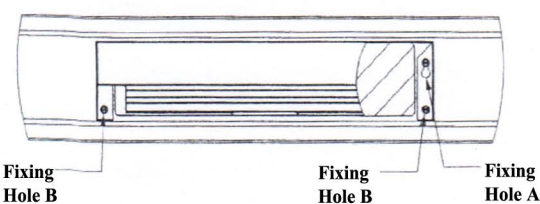
- 5** Wipe the surface of the fully secure Security Cowl with a soft damp cloth. Use warm water. If this is not effective a diluted solution of mild cleaning agent such as soap may be used.  
**Caution: Do not use abrasive cleaners. Do not use solvent based cleaners.**

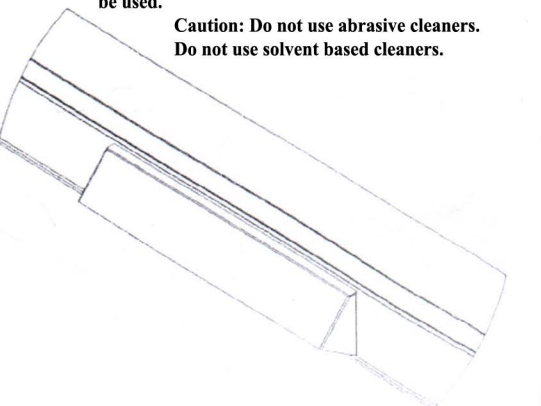

# WINLOCK

Halesfield 8, Telford, Shropshire, TF7 4E Tel: 01952 680178

Fax: 01952 684355 Sales: 01952 686777

Email: [sales@winlock.co.uk](mailto:sales@winlock.co.uk)

Web: [www.winlock.co.uk](http://www.winlock.co.uk)