


Features and Benefits

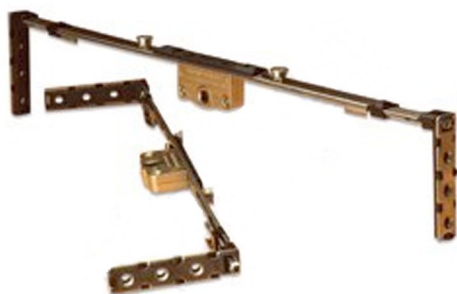

- ▣ Stainless steel construction for ultimate corrosion resistance.
- ▣ Fast-fit telescopic design with auto setting function which reduces fabrication time with no need for cropping.
- ▣ Clips into Eurogroove reducing the number of screws required.
- ▣ Rising cam system which provides better sash to frame clearance.
- ▣ Compression adjustable locking cams.
- ▣ Supplied as a kit, complete with keeps.
- ▣ High security accredited.
- ▣ BBA Accredited
- ▣ 10 Year corrosion and mechanical guarantee - Subject to Terms and Conditions

Technical Information

Material Specification

Zinc die cast components:
ZL2 with zinc passivate finish
Stainless steel parts: 430 S17 stainless steel (most components).
Gearbox reverse gears: carbon steel 70 (CS70).
Plastic parts: Nylon 66.

Additional Information

Box Qty: 20
Profile related keeps available (corner and mushroom).


Assessment Data

UKAS laboratory tested to BS EN 1670 has exceeded grade 4 classification for ultimate corrosion resistance.
Operational durability tested to 30,000 cycles.
Attained BS7950 across a comprehensive range of window systems.
BBA accreditation certificate number 2755.

WINLOCK

Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS
Tel:01952 602250 Fax:01952 602255.
Email:sales@winlock.co.uk Web:www.winlock.co.uk

Technical Drawing

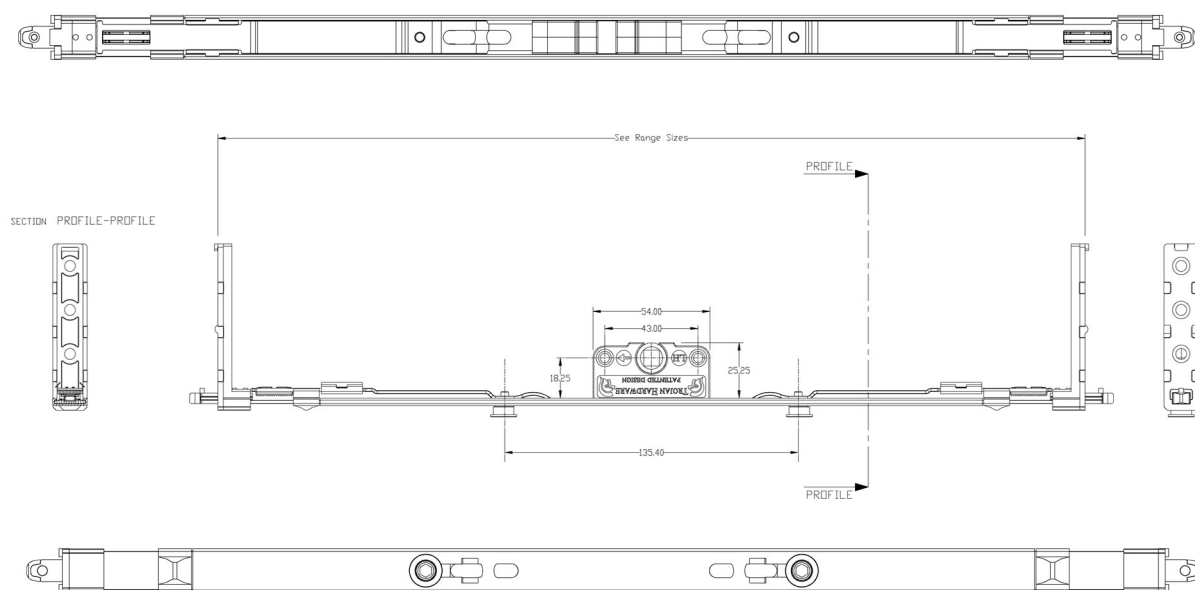

Part Numbers

Part No.	Description	Finish
WLS-SU-0330-400-1	Stallion 2 Shootbolt 300-400 mm	Austenitic Zinc Passivate Finish
WLS-SU-0330-400-2	Stallion 2 Shootbolt 400-540 mm	Austenitic Zinc Passivate Finish
WLS-SU-0330-400-3	Stallion 2 Shootbolt 540-820 mm	Austenitic Zinc Passivate Finish
WLS-SU-0330-400-4	Stallion 2 Shootbolt 820-1300 mm	Austenitic Zinc Passivate Finish
WLS-SU-0330-400-5	Stallion 2 Shootbolt 1300-1750 mm	Austenitic Zinc Passivate Finish

WINLOCK

Unit B, Hortonwood 31, Telford, Shropshire, TF1 7GS

Tel:01952 602250 Fax:01952 602255.

Email:sales@winlock.co.uk Web:www.winlock.co.uk